

FEATURES:


in compliance with cat.5e requirements and standards:

- ANSI/TIA/EIA 568-C.2
- ISO/IEC 11801 2nd Edition
- CENELEC EN 50173-1
- CENELEC EN 50288
- ETL verified for Gigabit Ethernet
- flame retardance according to IEC 60332-1-2
- RJ45 contacts 50µ inch gold plated
- molded snag proof boot
- RoHS compliant





CHARACTERISTICS:

Conductor	Material / Size	Bare Copper / 26 AWG	
	Construction	7/0.16 ± 0.005 mm	
Insulation	Material	HDPE	
	Diameter	0.8 ± 0.05 mm	
Sheath	Material	PVC	LS0H
	Diameter	5.3 ± 0.3 mm	5.3 ± 0.3 mm

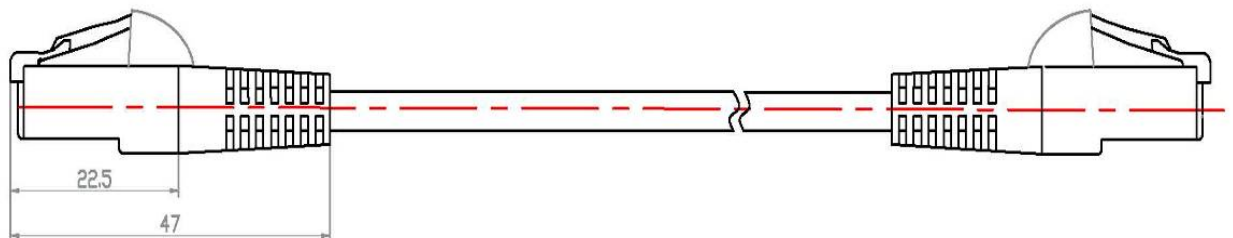

Premium Line Systems GmbH reserves the right to change specifications without prior notice.

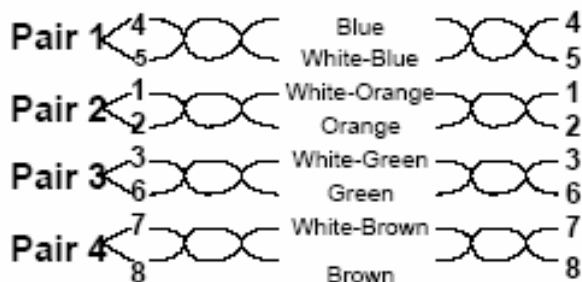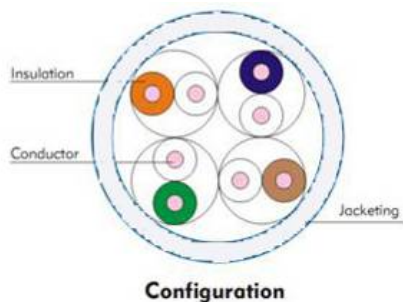


APPLICATION:

- Voice, ISDN
- 10 BASE-T
- 100 BASE-Tx Fast Ethernet
- 1000 BASE-T Gigabit Ethernet

ORDERING INFORMATION:

Part No. 1851xyyyz
 Description Premium Line cat. 5e U/UTP patch cord
 x: Jacket 1: PVC, 2: LSOH
 yyy: Length 005: 0.5m, 010: 1.0m, 020: 2.0m, 030: 3.0m, 050: 5.0m, 070: 7.0m, 100: 10,0m
 z: Color 1: white, 2: black, 3: red, 4: blue, 5: grey, 6: green, 8: yellow
 Packing 1pc / PE bag; 250pcs, 200pcs, 150pcs, 120pcs, 80pcs, 70pcs, 50pcs / carton

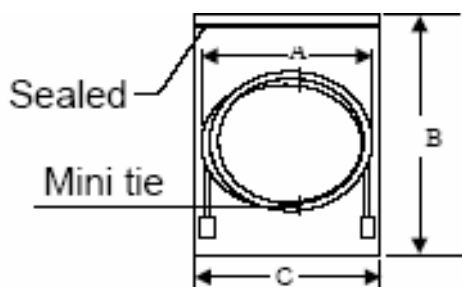

Packing	Length	L<3m	3m< L<10m	10m< L
	(A) mm	180+/-5	180+/-5	175~205
	Cable width			
	(B×C) mm	280×203	305×240	305×240
	PE bag size			
	Carton size	42*42*25cm		

Premium-Line Systems GmbH, Rosenheimer Str. 89, D-83064 Raubling, Germany

► TEL: + 49(0)8035 9836 0 ► Fax: + 49(0)8035 9836 22

Premium Line Systems GmbH reserves the right to change specifications without prior notice.